


PRO-USB

Computer interface to manage the settings of PRO third-generation

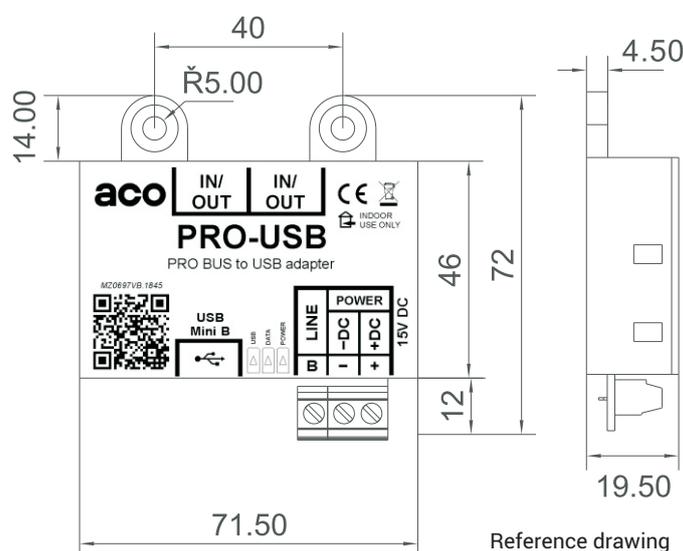

The interface enables easy and accessible support of any third-generation PRO series device from a computer. This applies, among others, to products such as COMO-PRO panels, 7-inch GLASS-PRO touch video inside units and other devices with "G3" in the name.

The module can be connected to any part of the system bus. Thanks to the individual numbers of each device (Dev ID) we can search, identify and manage the settings of all devices in the system (in groups or individually). The panels include the possibility of adding or removing proximity keyfobs (opening the door), assigning buttons to doorbell receivers, changing the time the door is unlocked, switching on the door opening notification inside the unit, and managing the list of apartments.

On the video inside the unit we can read its address, intercom address (and also modify them as a target), manage the volume of the bell, conversation, change the melody of the bell and modify the parameters of the image.

Each third-generation PRO device has an option of setting a 4-digit password to access the settings (the password can't be reset or recovered in any way – if you forget your password, please send the device back to the service centre with proof of purchase). All settings and the database of proximity keyfobs can be saved to a file or in the cloud (Google Drive, Dropbox).

PRO-USB also allows software updates of all third-generation PRO devices. The update can be carried out on the running system and simultaneously on all devices.

The module is connected to the third-generation PRO system bus with 3 wires (LINE, +DC and -DC) or RJ45 connectors (the module has 2 RJ45 connectors, which allow connecting anywhere to the bus). The USB connector is connected to a PC (the drivers should be installed automatically) and through the dedicated "PRO 3 Manager" application we can search and connect to all devices connected to the bus of the door entry system. The PRO 3 Manager application is constantly developed and improved, and thanks to the device update software, we have access to the latest PRO system capabilities.

Link to download the PRO 3 Manager application: www.aco.com.pl/pro3manager

If necessary, the drivers can be downloaded here: www.ftdichip.com/Drivers/D2XX.htm (recommended file to

KK0121envA.1905

PRO-USB technical data

Index	PRO-USB
Description	Computer interface to manage the settings of PRO third-generation devices
Dimensions (mm)	71.5x72x19.5
Design	ABS housing with ACO standard (type A)
Installation method	possible surface-mounting
System type	PRO (third-generation)
Connection	min. 3 wires or a cat. 5e or 6 cable
Power supply	15 V DC
Outputs/Inputs	<p>3 x ARK screw terminals: - PRO system line connection: "LINE" - power supply connection: "+DC" and "-DC"</p> <p>2 x RJ45 connector: - PRO system bus connection</p> <p>1 x mini USB - connection to a computer</p>
Properties	<ul style="list-style-type: none">- managing the settings of all PRO third-generation devices- possibility of connecting anywhere in the PRO system bus- software update of the PRO third-generation series of devices- searching for all devices in the system- individual or group management of devices- possibility of managing devices and updates in a running system- one software for supporting all devices: PRO 3 Manager- free software can be downloaded from www.aco.com.pl



DOOR ENTRY

Aco sp. z o.o. sp. komandytowa
ul. Diamentowa 7, 62-002 Suchy Las

T: +48 61 843 93 71
E: biuro@aco.com.pl

NIP (Tax ID No.): 9721258093 www.aco.com.pl
REGON: 362759523